

NXP

**Multipurpose
Water/Water for indoor installation
scroll compressor plate exchanger
Cooling capacity 109 - 501kW
Heating capacity 123 - 560kW**

HFC
Refrigerant
R410A



Aermec participate in the EUROVENT program: LCP the products are present on the site www.eurovent-certification.com



- **DESIGNED FOR 2 AND 4-PIPE SYSTEMS**
- **HIGH EFFICIENCY EVEN AT PART LOAD**
- **OPTION VERSION WITH BUILT-IN HYDRONIC KIT**

Characteristics

NXP is the range of multipurpose external units operating on refrigerant R410A, designed for **2 or 4-pipe systems**. With just one unit simultaneous and independent requests for hot and chilled water can be accommodated all year round.

Version

NXP_° Multipurpose standard

NXP_L Multipurpose Low noise

Operational limits (1)

- Maximum leaving water temperature 55°C Heating mode
- 2refrigerant circuits
- High efficiency scroll compressors with low power input

- Heat exchangers optimised to benefit from the excellent heat transfer characteristics of R410A.
- High and low pressure transducers as standard
- The built-in hydronic module includes the main water circuit components; it is available in various configurations with one or two pumps with high or low head both on the system side and recovery side.
- Microprocessor controls
 - Control from the leaving water temperature
 - Automatic rotation of compressors and pumps based on operating hours
 - Programmable time-clock
 - Analog Inputs Multifunction 0-10V, or da 4-20mA
- Load limiting safety control

- Electrical panel with wires numbered all the main components of security and control
- Externally mounted user interface with display of all operating parameters in 4 languages
- Structure and base in hot dip galvanised sheet steel with epoxy pain finish (RAL 9002)

(1) For more details on operating limits, refer to the technical documentation available on the website www.aermec.com

Accessories

- **AER485P1:** RS-485 interface for supervising systems with MODBUS protocol.
- **AERNET:** the device allows the control, the management and the remote monitoring of a Chiller with a PC, smartphone or tablet using Cloud connection. AERNET works as Master while every unit connected is configured as Slave (max. 6 unit); also, with a simple click is possible to save a log file with all the connected unit datas in the personal terminal for post analysis.
- **MULTICHILLER_NRP:** Control system to switch the individual multipurpose on and off, and

command them, in a system in which several units are installed in parallel, always ensuring a constant delivery to the exchanger.

- **PGD1:** Simplified remote panel. Allows control of basic unit functions and alarm notification. Remote mounted up to 500 m away with TWISTED PAIR SCREENED cable and TCONN6J000..
- **AVX** Anti-vibration mounts to be installed under the base of the unit.

Accessories factory fitted only

- **DRE:** Electronic soft starter which reduces start-

ing current.

Available only with 400V power supply.

- **RIF:** Power factor correction. Connected in parallel to the motor allowing about 10% reduction of input current.

Compatibility of accessories

Mod. NXP	Vers.	500	550	600	650	700	750	800	900	1000	1250	1400	1500	1650
AER485P1	All
AERNET	All
MULTICHILLER_NRP	All
PGD1	All
AVX	(1) All
Accessories factory fitted only														
DRE	(2) All	501	551	601	651	701	751	801	901	1001	1251	1401	1401	1401
RIF	All	98	98	95	95	95	95	95	96	97	97	97	97	97

(1) Contact us for the compatibility

(2) Only available for 400V/3N/50Hz power supply

Unit Configurator

By suitably combining the numerous options available it is possible to configure each model in such a way as to meet the most demanding of system requirements.

Field	Code
1,2,3	NXP
4,5,6,7	Size
	0500-0550-0600-0650-0700-0750-0800-0900-1000-1250-1400-1500-1650
8	Field of use:
	° standard thermostatic expansion valve (3)
9	System type
	2 2-pipe system (cooling + DHW heating)
	4 4-pipe system (cooling + heating)
10	Version
	° Standard
	L Low noise
11	Power supply
	° 400V/3N/50Hz with circuit breakers
	4 220V/3/50Hz with circuit breakers (4)
	5 500V/3/50Hz with circuit breakers (5)
12	System integrated hydronic module
	° without pumps or buffer tank
	M n°1 low head pump
	N n°2 low head pumps
	O n°1 high head pump
	P n°2 high head pumps
13	Heat recovery integrated hydronic module
	° without pumps or buffer tank
	U n°1 low head pump
	V n°2 low head pumps
	W n°1 high head pump
	Z n°2 high head pumps

(3) leaving water above +4 °C

(4) Only size 0500÷0700

(5) Only size 0800÷1000

Technical Data

NXP - Multipurpose for 2-pipe system *		500	550	600	650	700	750	800	900	1000	1250	1400	1500	1650		
		V/Ph/Hz					400V/3/50Hz									
Cooling system side (°) (L)																
12°C / 7°C	Cooling capacity	(1)	kW	109	117	141	157	192	218	252	281	305	345	392	446	501
	Total input power	(1)	kW	24	26	31	35	43	49	56	62	66	76	85	98	110
	EER	(1)		4,51	4,46	4,56	4,47	4,51	4,46	4,5	4,49	4,61	4,56	4,6	4,54	4,54
	ESEER	(1)		5,84	5,78	5,84	5,8	5,79	5,76	5,69	5,76	6,05	5,91	5,98	5,85	5,86
	Water flow rate system side	(1)	l/h	18755	20146	24376	27139	33192	37640	43434	48392	52654	59430	67539	76989	86485
	Pressure drop	(1)	kPa	19	21	21	25	27	29	20	25	19	23	26	32	34
	Water flow rate source side	(1)	l/h	22558	24271	29256	32655	39871	45278	52350	58310	63243	71477	81081	92547	103914
Pressure drop	(1)	kPa	33	37	41	49	59	69	28	34	26	32	36	45	49	
Heating system side (°) (L)																
40°C / 45°C	Heating capacity	(2)	kW	123	131	159	176	211	240	289	321	353	384	434	491	551
	Total input power	(2)	kW	29	32	38	43	51	59	70	78	83	91	102	117	130
	COP	(2)		4,17	4,13	4,16	4,11	4,12	4,06	4,12	4,1	4,25	4,23	4,25	4,19	4,22
	Water flow rate system side	(2)	l/h	21013	22491	27168	30160	36076	40998	49658	55144	60599	65943	74492	84108	94416
	Pressure drop	(2)	kPa	27	31	34	41	49	57	24	29	22	26	30	38	40
	Water flow rate source side	(2)	l/h	27248	29109	35220	38994	46709	52918	64027	71019	78774	85679	96918	109091	122810
Pressure drop	(2)	kPa	36	40	39	47	51	56	40	48	36	44	50	63	67	
Heating DHW side (°) (L)																
40°C / 45°C	Heating capacity	(3)	kW	125	133	161	179	214	243	294	326	355	391	441	498	560
	Total input power	(3)	kW	29	32	38	43	51	58	70	78	83	91	102	118	132
	COP	(3)		4,26	4,21	4,26	4,21	4,2	4,17	4,2	4,16	4,27	4,29	4,3	4,23	4,26
	Water flow rate recovery side	(3)	l/h	21380	22870	27647	30694	36679	41713	50401	55862	60964	67043	75574	85323	95990
	Pressure drop	(3)	kPa	21	24	24	29	31	35	25	30	22	27	31	39	42
	Water flow rate source side	(3)	l/h	27945	29810	36137	40009	47803	54252	65510	72483	79555	87695	98988	111399	125643
	Pressure drop	(3)	kPa	37	42	41	50	53	58	42	50	38	46	52	66	70
Cooling with heat recovery (°) (L)																
40°C / 45°C - 7°C	Cooling capacity	(4)	kW	96	102	125	139	165	190	226	250	282	308	340	391	444
	Recovered power	(4)	kW	124	132	160	179	213	245	291	323	361	393	436	502	567
	Total input power	(4)	kW	28,9	31,2	37,3	41,9	50,2	57,5	69,1	77	82,3	89,8	101,2	116	129,6
	Water flow rate system side	(4)	l/h	16568	17667	21508	23939	28503	32842	38879	43108	48668	53048	58568	67500	76593
	Pressure drop	(4)	kPa	15	17	17	20	22	24	17	20	15	19	21	26	28
	Water flow rate recovery side	(4)	l/h	21183	22654	27472	30630	36518	42018	49961	55438	61889	67463	74778	86029	97273
	Pressure drop	(4)	kPa	22	25	25	30	33	36	26	31	24	28	33	41	44
TER		W/W	7,6	7,51	7,63	7,57	7,53	7,57	7,48	7,45	7,82	7,8	7,67	7,7	7,81	

* Only units configured for 2-pipe systems are certified by Eurovent

NXP - for 4-pipe system		500	550	600	650	700	750	800	900	1000	1250	1400	1500	1650		
		V/Ph/Hz					400V/3/50Hz									
Cooling system side (°) (L)																
12°C / 7°C	Cooling capacity	(1)	kW	109	117	141	157	192	218	252	281	305	345	392	446	501
	Total input power	(1)	kW	24	26	31	35	43	49	56	62	66	76	85	98	110
	EER	(1)		4,51	4,46	4,56	4,47	4,51	4,46	4,5	4,49	4,61	4,56	4,6	4,54	4,54
	ESEER	(1)		5,84	5,78	5,84	5,8	5,79	5,76	5,69	5,76	6,05	5,91	5,98	5,85	5,86
	Water flow rate system side	(1)	l/h	18755	20146	24376	27139	33192	37640	43434	48392	52654	59430	67539	76989	86485
	Pressure drop	(1)	kPa	19	21	21	25	27	29	20	25	19	23	26	32	34
	Water flow rate source side	(1)	l/h	22558	24271	29256	32655	39871	45278	52350	58310	63243	71477	81081	92547	103914
Pressure drop	(1)	kPa	33	37	41	49	59	69	28	34	26	32	36	45	49	
Heating system side (°) (L)																
40°C / 45°C	Heating capacity	(2)	kW	125	133	161	179	214	243	294	326	355	391	441	498	560
	Total input power	(2)	kW	29	32	38	43	51	58	70	78	83	91	102	118	132
	COP	(2)		4,26	4,21	4,26	4,21	4,2	4,17	4,2	4,16	4,27	4,29	4,3	4,23	4,26
	Water flow rate recovery side	(2)	l/h	21380	22870	27647	30694	36679	41713	50401	55862	60964	67043	75574	85323	95990
	Pressure drop	(2)	kPa	21	24	24	29	31	35	25	30	22	27	31	39	42
	Water flow rate source side	(2)	l/h	27945	29810	36137	40009	47803	54252	65510	72483	79555	87695	98988	111399	125643
Pressure drop	(2)	kPa	37	42	41	50	53	58	42	50	38	46	52	66	70	
Cooling with heat recovery (°) (L)																
40°C / 45°C - 7°C	Cooling capacity	(4)	kW	96	102	125	139	165	190	226	250	282	308	340	391	444
	Recovered power	(4)	kW	124	132	160	179	213	245	291	323	361	393	436	502	567
	Total input power	(4)	kW	28,9	31,2	37,3	41,9	50,2	57,5	69,1	77	82,3	89,8	101,2	116	129,6
	Water flow rate system side	(4)	l/h	16568	17667	21508	23939	28503	32842	38879	43108	48668	53048	58568	67500	76593
	Pressure drop	(4)	kPa	15	17	17	20	22	24	17	20	15	19	21	26	28
	Water flow rate recovery side	(4)	l/h	21183	22654	27472	30630	36518	42018	49961	55438	61889	67463	74778	86029	97273
	Pressure drop	(4)	kPa	22	25	25	30	33	36	26	31	24	28	33	41	44
TER		W/W	7,6	7,51	7,63	7,57	7,53	7,57	7,48	7,45	7,82	7,8	7,67	7,7	7,81	

Date (14511:2013)

(1) Water consumption 12°C/7°C, Water source 30°C/35°C (EUROVENT)

(2) Water consumption 40°C/45°C, Water source 10°C/7°C (EUROVENT)

(4) Water total recovery 40°C/45°C, Water consumption (out) 7°C

TER Global Efficiency

Technical Data

GENERAL DATA		500	550	600	650	700	750	800	900	1000	1250	1400	1500	1650	
Electrical data only cooling mode															
Total input current	(7)	A	47	50	58	65	83	90	92	100	106	135	149	169	188
only heating mode															
Total input current	(7)	A	54	58	68	76	95	103	112	123	130	154	173	196	217
only recovery mode															
Total input current	(7)	A	54	57	67	75	94	103	110	122	129	153	171	194	216
Cooling heat recovery mode															
Total input current	(7)	A	54	57	67	75	95	103	110	121	129	153	171	195	216
Maximum current (FLA)	(7)	A	71	77	91	102	124	135	163	179	195	208	237	266	295
Starting current (LRA)	(7)	A	214	220	206	216	267	323	332	340	356	459	488	600	629
Compressors															
Compressors	type		scroll												
	n°		3	3	4	4	4	4	4	4	4	4	4	4	4
Circuits	n°		2	2	2	2	2	2	2	2	2	2	2	2	2
Refrigerant	R410A														
Exchanger Plant (hot/cold) 2 pipe system / Plant (cold) 4 pipe system															
Exchanger	type		plate												
	n°		1	1	1	1	1	1	1	1	1	1	1	1	1
hydraulic connections	(7) (in/out)	Ø	2" 1/2	2" 1/2	2" 1/2	2" 1/2	2" 1/2	2" 1/2	2" 1/2	3"	3"	3"	3"	3"	3"
Exchanger Recovery (DHW) 2 pipe system / Plant (hot) 4 pipe system															
Exchanger	type		plate	plate	plate	plate	plate	plate	plate	plate	plate	plate	plate	plate	plate
	n°		1	1	1	1	1	1	1	1	1	1	1	1	1
hydraulic connections	(7) (in/out)	Ø	2" 1/2	2" 1/2	2" 1/2	2" 1/2	2" 1/2	2" 1/2	2" 1/2	3"	3"	3"	3"	3"	3"
Exchanger Source side															
Exchanger	type		plate	plate	plate	plate	plate	plate	plate	plate	plate	plate	plate	plate	plate
	n°		1	1	1	1	1	1	1	1	1	1	1	1	1
hydraulic connections	(7) (in/out)	Ø	2" 1/2	2" 1/2	2" 1/2	2" 1/2	2" 1/2	2" 1/2	2" 1/2	3"	3"	3"	3"	3"	3"
System integrated hydronic module For more information, refer to the selection program Magellan or the technical documentation available															
Sound data (Cooling mode)															
Sound pressure	(8) °	dB(A)	46	47	47	48	50	54	56	56	56	58	58	60	60
	(8) L	dB(A)	40	41	41	42	44	48	50	50	50	52	52	54	54
Sound power	(8) °	dB(A)	78	79	79	80	82	86	88	88	88	90	90	92	92
	(8) L	dB(A)	72	73	73	74	76	80	82	82	82	84	84	86	86

Sound power

Aermec determines sound power values on the basis of measurements made in accordance with UNI EN ISO 9614-2, as required for Eurovent certification.

Sound pressure


Sound pressure in free field, at 10 m distance from the external surface of the unit (in accordance with UNI EN ISO 3744).

(7) The technical data are versions without hydronic module integrated

(8) Calculated in cooling mode

Note: For more information, refer to the selection program Magellan or the technical documentation available on the website www.aermec.com

Dimensions (mm)

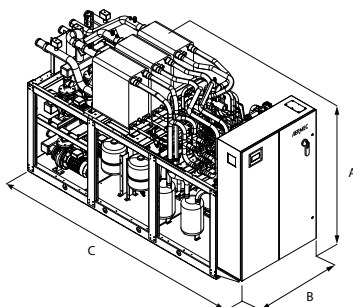

Mod. NXP (without pumps)	Vers	500	550	600	650	700	750	800	900	1000	1250	1400	1500	1650
A	°	1976	1976	1976	1976	1976	1976	2021	2021	2021	2021	2021	2021	2021
	L	2120	2120	2120	2120	2120	2120	2120	2120	2120	2120	2120	2120	2120
B	(mm)	1250	1250	1250	1250	1250	1250	1250	1250	1250	1250	1250	1250	1250
C	(mm)	2600	2600	2600	2600	2600	2600	2600	2600	2600	2600	2600	2600	2600

Mod. NXP (with pumps)	Vers	500	550	600	650	700	750	800	900	1000	1250	1400	1500	1650
A	°	1976	1976	1976	1976	1976	1976	2021	2021	2021	2021	2021	2021	2021
	L	2120	2120	2120	2120	2120	2120	2120	2120	2120	2120	2120	2120	2120
B	(mm)	1250	1250	1250	1250	1250	1250	1250	1250	1250	1250	1250	1250	1250
C	(mm)	3452	3452	3452	3452	3452	3452	3452	3452	3750	3750	3750	3750	3750

Aermec reserves the right to make all modification deemed necessary for improving the product at any time with any modification of technical data.

Aermec S.p.A.
Via Roma, 996 - 37040 Bevilacqua (VR) - Italia
Tel. 0442633111 - Telefax 044293577
www.aermec.com

Cod.: SNXPUY.02 / 1706